# HenLv

#### **Features**

- Wide voltage input 85-305VAC/120-430VDC
- DIP
- Operating temperature range: -40°C∼+85°C
- Isolation voltage 3000/4000VAC 5mA 1Minute
- Internal SMD design
- High flame retardant plastic shell
- Heat dissipation mode: natural air cooling
- It has good shielding anti-interference performance and electromagnetic compatibility, lightning protection, output over current, short circuit protection, overheat protection, selfrecovery and other functions

#### **Product Picture**



**Patent Protection** 









EMC-EN55032 EN55035 LVD-EN62368

#### **Dimensions**

# AC220S\_\_ZDK-50W Series Dimensions





Pin mode						
Pin	Function					
1	FG					
2	AC(N)					
3	AC(L)					
4	0V					
5	NC					
6	NC					
7	NC					
8	+XXVDC					

Note:

Size unit: mm[inch]

Unmarked tolerance:  $\pm 0.25[\pm 0.01]$ Wire bond strength: 24-12 AWG Tightening torque: Max 0.4 N-m


Guide rail: TS35


The device layout is for reference only.





## AC220S ZD-50W Series Dimensions





**Front View** 

Pin mode						
Pin	Function					
1	FG					
2	AC(N)					
3	AC(L)					
4	0V					
5	NC					
6	NC					
7	NC					
8	+XXVDC					

Note:

Size unit: mm[inch]

Unmarked tolerance:  $\pm 0.25[\pm 0.01]$ Wire bond strength: 24-12 AWG Tightening torque: Max 0.4 N-m The device layout is for reference only.

# **Application**

Industrial control and remote DC power supply system, switching system, AC/DC(5V products), railway communication, communication interface converter, cellular telephone, semiconductor laser, display screen, monitoring equipment, petrochemical, portable instrument, medical instrument, automatic control device, burglar alarm, handheld instrument, digital circuit, IC card meter, air conditioning computer controller, LED production Products, digital products, power adapters, etc.

Selection Guide								
Model	Input(V)	Output (V±2%)	Current (mA)	Efficiency( %)	Isolation (VAC)	Weight (g±0.5)	Certification	
AC220S05ZD(K)-50W	85-305VAC (120-430VDC)	5	9000	86	3000/4000			
AC220S09ZD(K)-50W		9	5556	88	3000/4000			
AC220S12ZD(K)-50W		12	4167	89	3000/4000			
AC220S15ZD(K)-50W		15	3333	89	3000/4000			
AC220S24ZD(K)-50W		24	2083	89	3000/4000			

Note: The company for customers to customize any input and output module power supply, if you have special needs, please call our company, unless otherwise specified, input =Vi, the characteristics of the module power supply should meet the requirements of Table 1, and applicable to the full temperature range (-40°C≤Tc≤85°C)

Mechanical Specific	cations
Size	96 10 x 54 00 mm







Electrical Specifications						
Specifications	Symbol	Conditions Vi ,-40°C≤Tc≤85 (Unless otherwise specified)	Min	Min	Unit	
Output Voltage	Vo	Full Load	Vo-2%	Vo+2%	V	
Output Current	lomax	_	_	P(Power)/ U(Output voltage)	Α	
Output Ripple Voltage	Vp-p	Full Load, Vi, BW=20MHz, Normal Temperature	100	250	mV	
Output Noise Voltage	Vp-p	Full Load, Vi, BW=20MHz, Normal Temperature	120	300	mV	
Voltage Regulation	Sv	Vimin、Vi、Vimax,Full Load	_	≤±1	%	
Load Adjustment	Si	Vi, Io=(10%~100%)Iomax	_	≤±1.5	%	
Insulation Resistance	Rl	Input-output, Insulation Voltage: 500VDC	100	_	МΩ	


General Specifications					
	Magnetic Field Sensitivity Test	GB6833.2-87			
EMC Specifications	Electrostatic Discharge Sensitivity Test	GB6833.3-87			
	Radiation Sensitivity Test	GB6833.5-87			
	Conduction Sensitivity Test	GB6833.6-87			
Temperature Drift	≤±0.03%/°C				
Storage Temperature	-40°C~125°C				
Input Frequency	47Hz~63Hz				
Humidity	20%~95%RH				
Leakage Current	5mA(max)				
MTBF	>500000H				

# **Typical Specifications Curves**










#### Efficiency/Load Graph






HenLv Technology (NingBo) Co., Ltd

www.henlv.net 2024.10



# **Typical Application**

## **Design Reference**

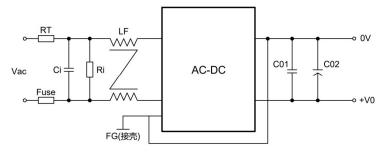

#### **Recommendation Test**

Filter: In some circuits that are sensitive to noise and ripple, an external filter capacitor can be connected to the DC/DC input and output terminals to reduce the impact of ripple on the system, but the value of the filter capacitor should be appropriate, if the capacitor is too large, it is likely to cause startup problems, for each output, under the condition of ensuring safe and reliable operation, the maximum capacitance of the filter capacitor can be referred to the external capacitance table. In order to obtain very low ripple, an "LC" filter network can be connected to the input and output end of the DC/DC converter, so that the filtering effect will be better, and it should be noted that the size of the inductance value and the frequency of the "LC" filter network should be staggered from the frequency of the DC/DC module power supply to avoid mutual interference. For each output, under safe and reliable working conditions, the recommended capacitive load value is shown in (Table 1).

Input voltage (Vin+)	C01	C02	RT	Ci(UF)	Ri(KR)	LF(mH)
85-305V	104M/50V	1000uF/16V	8D-7	0.1/275V	560	8-10


Recommended output max capacitive load value table (Table 1)

Note: Please note that the main grounding of the output and the grounding of the load are connected to the ground, so that even if the product has problems, it will not cause harm to the human body. The ground requirements for the auxiliary roads are isolated and can be grounded without grounding.

#### **Precautions**

#### **Package**

This series of modules are packed in shockproof and anti-static foam.





HenLy Technology (NingBo) Co., Ltd www.henlv.net

# **AC-DC** Converter AC220S\_ZD(K)-50W Series



#### **Transport**

The package containing the module is allowed to be transported by any means of transport, which should avoid direct rain and snow and mechanical damage.

## **Storage**

The module should be stored in a warehouse where the ambient temperature is -40 degrees ~ 125 degrees, the relative humidity is 20%~95%, and the surrounding environment is free from acidic, alkaline and other harmful gases.

Note: The above are the performance indicators of the product series listed in this manual. Some indicators of non-standard products may exceed the above requirements, so if there is any inconsistency between the manual and the product specification documents, please refer to the specification documents. If you have special needs, please contact us directly.

